
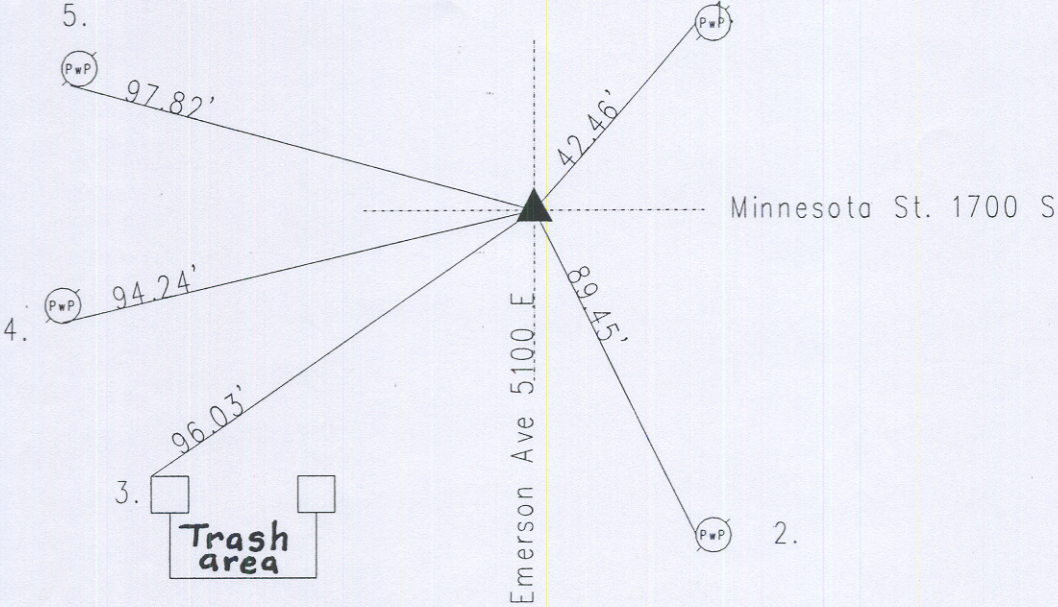


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 15 TOWNSHIP 15 RANGE 4
DATE: 6-30-06
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-30-00
IN. S.P.C. E ZONE NAD '83
NAME: 15041504
N: 499363.1212(m)
E: 64336.1103(m)

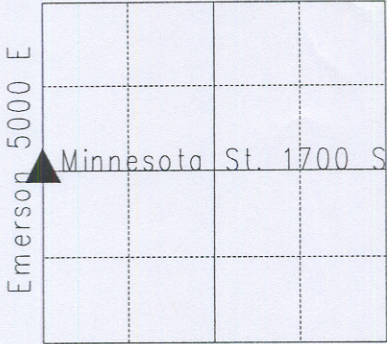

15041504		
REF.	DISTANCE	DESCRIPTION
1.	42.46'	PK nail W PwP#574 8"up
2.	89.45'	PK nail W PwP#244-614 A 12"up
3.	96.03'	NW corner of 6" square iron post
4.	94.24'	PK nail S PwP# light pole
5.	97.82'	PK nail S PwP#no # 8"up

15041504 W Q corner
CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 15" beech S 83 E 18 links; 18" dogwood N 35 W 17 links per Marion County Atlas pg. 10. No witness or monuments were recorded in Warren Township Legal Survey Book. Reference dated 1923 by Joyce called a cut cross in pavement. Reference 8-9-52 by Monroe called iron pin. Reference 8-27-68 by Kantner called a PK nail 1" down. Reference dated 2-9-1977 by Wilcoxen called the corner as an iron pin 8" down. Reference dated 8-4-89 by Green called iron pin 8" down. Reference dated 3-7-94 by Kiste called excavated and iron pin found 12" down; set Harrison in place of iron pin. Reference dated 12-13-02 by Wilcoxen called per re-surfacing added a 1" riser to the monument to raise the marker. Reference dated 6-30-06 by Wilcoxen called Harrison.